

# **KEEPGARD STANDARD**

## PAINT PROTECTION FILM

**Technical Data Sheet** 


#### **WARRANTY**

KEEPGARD STANDARD has a 7-year warranty for yellowing, bubbling, and cracking. This is an excellent choice for the long-term protection of your car.



#### **FEATURES AND STRUCTURES**

- √ Anti-Fouling
- √ Self-Healing
- √ Highest Transparency & Gloss
- √ Water Repellency
- √ Anti-Contamination
- √ Non-Yellowing
- √ Anti-Solvent
- √ Excellent Adhesion Finish
- **√** Easy to Installation

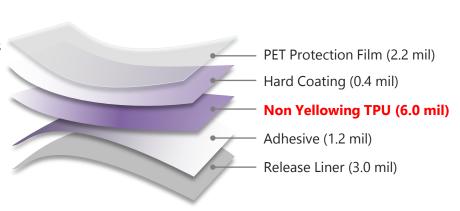

### **TYPICAL PROPERTIES**

PROPERTY	TYPICAL VALUE	TEST METHOD
Thickness	7.6mil (±0.2mil)	
Gloss(60°)	Above 90 GU	KS M ISO2813 : 2015
Contact Angle	103°	ASTM D5946-17
Tensile Strength	23~25 MPa	ASTM D882-18
Elongation at break	320~350%	ASTM D882-18
Adhesion Force	1300/inch, 1600/inch	JIS K 6854-2
Residual Adhesive	None	Put on painting plate then peel off with reverse direction after exposing to 80°C for 24hr, -8°C for 24hr, 20°C for 12hr in sequence
Discoloring	△E 1.2 △E 0.3	QUV Tester, UVA-340, Irradiance 0.76W/m² Xenon Arc 12,000W /1,000hrs