




KEEPGARD WAVE

10 YEARS WARRANTY

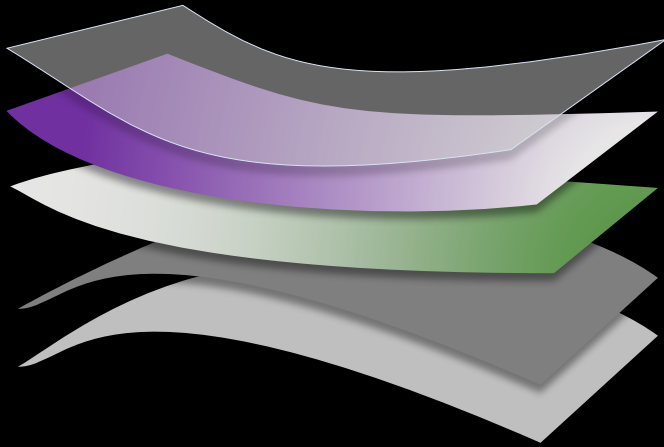

- 보호필름 (2.2 mil)
- 탑 코팅 (0.6 mil)
- 무황변 TPU(6.0 mil)
- 점착 (1.4 mil)
- 이형 필름 (3.0 mil)

특성	검사 값	검사 방법
두께	8mil ($\pm 0.2\text{mil}$)	Thickness Gauge
광택(60°)	Above 95 GU	Glossmeter (KS M ISO2813 : 2015)
접촉각	Above 103	ASTM D5946
자가 복원력	Within 10 min	RT, Copper Brush Scratching
내화학성	No Detrimental Effect	IPA, Motor oil, Acetone After Dropping 24hrs later
인장강도	23 $\pm$ 3Mpa	ASTM D882-18
신장률	300% $\pm$ 10	ASTM D882-18
점착	1,600gf/in $\pm$ 100 1,900gf/in $\pm$ 100	Initial, State Adhesion JIS K 6854-2
점착 접이	None	
황변	ΔE 0.4~0.8	QUV Tester, UVA-340, Irradiance 0.7 6W/m ² Xenon Arc 12,000W /1,000hrs



G H T
GENUINE HOPE TECHNOLOGY